

Technical Data Sheet

PolyMax™ PETG

www.polymaker.com

V5.0



**PolyMax™
PETG**

PolyMax™ PETG offers better mechanical properties than any other regular PETG making it a good candidate for a wide range of applications.


PHYSICAL PROPERTIES

Property	Testing Method	Typical Value
Density	ISO1183, GB/T1033	1.24 g/cm ³ at 21°C
Melt Index	240°C, 2.16kg	17.1 g/10min
Light Transmission	N/A	N/A
Flame retardancy V2	UL94	V2

CHEMICAL RESISTANT DATA

Property	Testing Method
Effect of weak acids	Not Resistant
Effect of strong acids	Not Resistant
Effect of weak alkalis	Not Resistant
Effect of strong alkalis	Not Resistant
Effect of organic solvent	Not Resistant
Effect of oils and grease	No data available
Effect of Sunlight	No data available


MOISTURE ABSORPTION CURVE

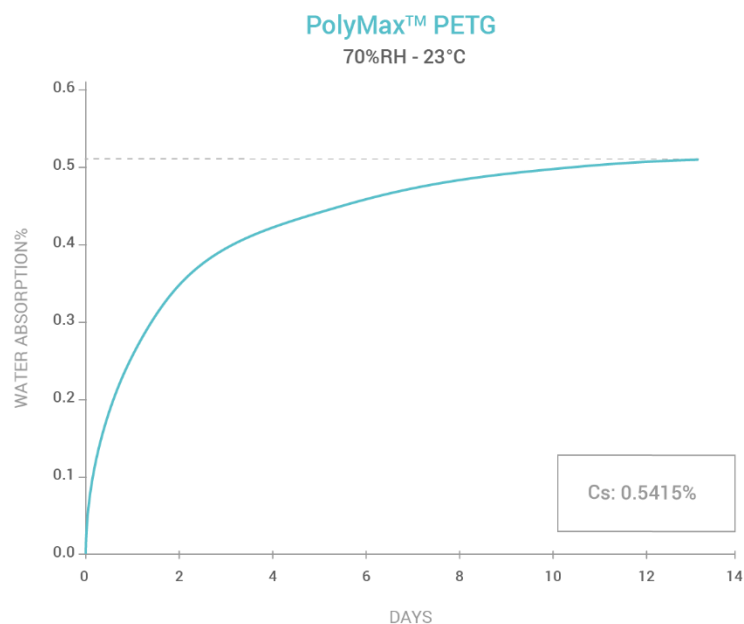

THERMAL PROPERTIES

Property	Testing Method	Typical Value
Glass transition	DSC, 10°C/min	79 °C
Melting temperature	DSC, 10°C/min	N/A
Crystallization temperature	DSC, 10°C/min	N/A
Decomposition temperature	TGA, 20°C/min	>370 °C
Vicat softening temperature	ISO 306 GB/T 1633	82 °C
Heat deflection temperature	ISO 75 1.8MPa	72.3 °C
Heat deflection temperature	ISO 75 0.45MPa	75.7 °C
Thermal conductivity	N/A	N/A
Heat shrinkage rate	N/A	N/A

HDT CURVE

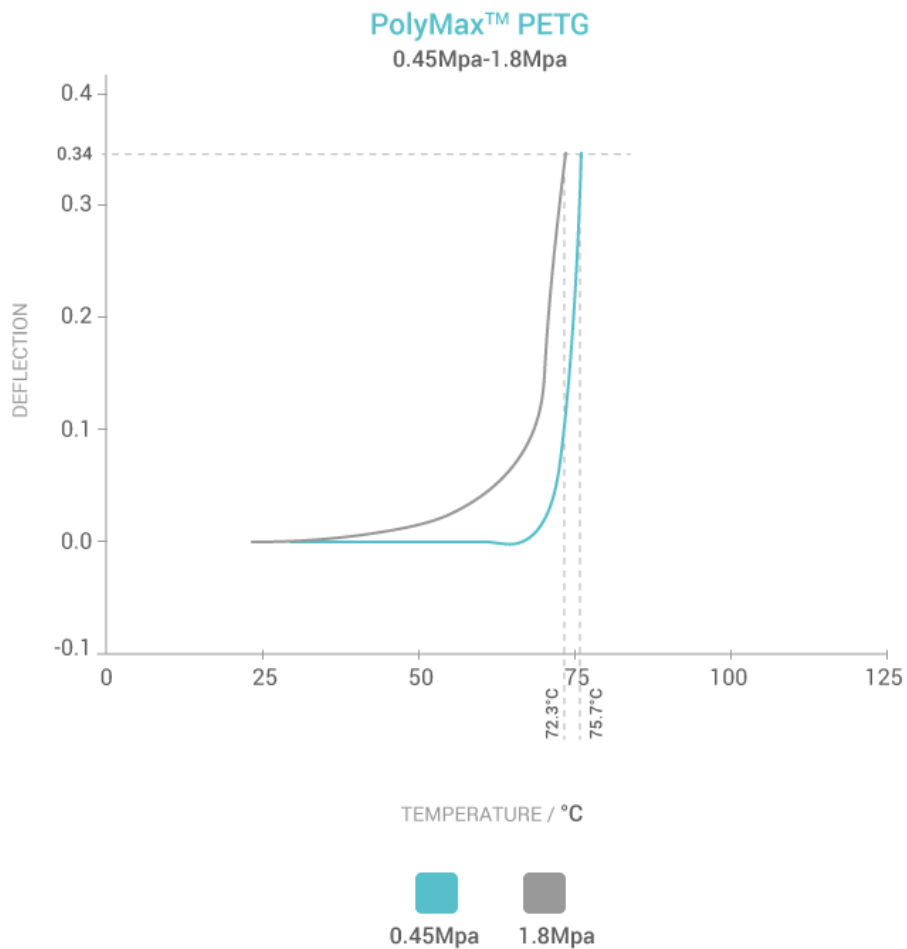

MECHANICAL PROPERTIES



Property	Testing Method	Typical Value
Young's modulus (X-Y)	ISO 527, GB/T 1040	1523 ± 50 MPa
Young's modulus (Z)		1603 ± 40 MPa
Tensile strength (X-Y)	ISO 527, GB/T 1040	31.7 ± 0.1 MPa
Tensile strength (Z)		29.4 ± 1.0 MPa
Elongation at break (X-Y)	ISO 527, GB/T 1040	4.43 ± 0.6 %
Elongation at break (Z)		3.10 ± 0.51 %
Bending modulus (X-Y)	ISO 178, GB/T 9341	1068 ± 94 MPa
Bending modulus (Z)		N/A
Bending strength (X-Y)	ISO 178, GB/T 9341	58.3 ± 0.38 MPa
Bending strength (Z)		55.1 ± 4.9 MPa
Charpy impact strength (X-Y)	ISO 179, GB/T 9343	9.7 ± 2.6 kJ/m ²
Charpy impact strength (Z)		2.4 ± 0.6 kJ/m ²

HOW TO MAKE SPECIMENS

Printing temperature	240 °C
Bed temperature	80 °C
Shell	2
Top & bottom layer	4
Infill	100%
Environmental temperature	25 °C
Cooling fan	OFF



TENSILE TESTING SPECIMEN

ASTM D638 (ISO 527, GB/T 1040)

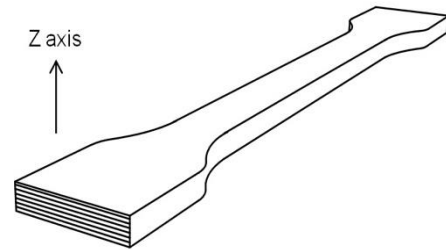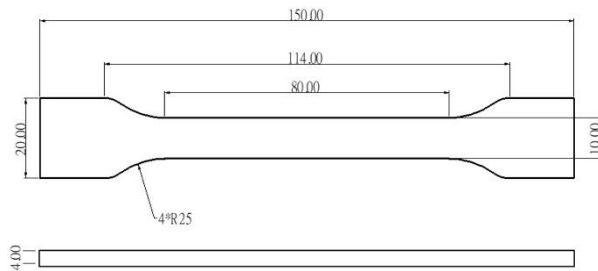



FLEXURAL TESTING SPECIMEN

ASTM D638 (ISO 527, GB/T 1040)

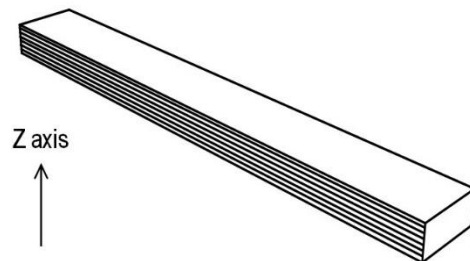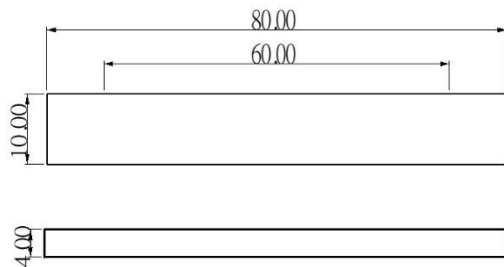

IMPACT TESTING SPECIMEN

ASTM D638 (ISO 179, GB/T 1043)

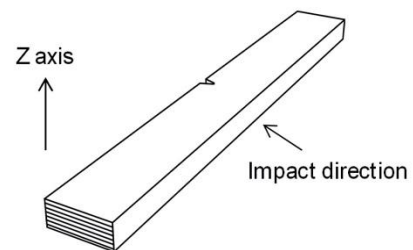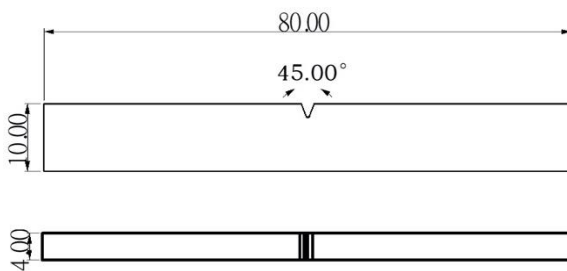

DISCLAIMER:

The typical values presented in this data sheet are intended for reference and comparison purposes only. They should not be used for design specifications or quality control purposes. Actual values may vary significantly with printing conditions. End- use performance of printed parts depends not only on materials, but also on part design, environmental conditions, printing conditions, etc. Product specifications are subject to change without notice.

Each user is responsible for determining the safety, lawfulness, technical suitability, and disposal/ recycling practices of Polymaker materials for the intended application. Polymaker makes no warranty of any kind, unless announced separately, to the fitness for any use or application. Polymaker shall not be made liable for any damage, injury or loss induced from the use of Polymaker materials in any application.